













Digital ws2811/ ws2812b LED Strip series

Seq.	Photo	Item No.	IP rating	Price/M (5-300m)	305-1000m	> 1000m	IC type	Led/m	Pixels/M eter	Voltage (DC)	Max Power	Grey Grade	Description
1	 <p>ws2812b- 30-5v</p>	BW5050RGB30T-2812b-5v	IP40	\$3.7	\$3.4		ws2812b In built IC	30	30	5v	9w	256	1. FPC width: 10*4mm; 2. FPC color: white/black; 3. Installation: 3M adhesive tape(IP40/65); 4. G.W:280g/Roll, 5M/Roll
		DW5050RGB30T-2812b-5v	IP65/67	\$4.2	\$3.9								
		ZW5050RGB30T-2812b-5v	IP68	\$4.7	\$4.4								
2	 <p>ws2812b-30-12V</p>	BW5050RGB30T-2812b-12v	IP40	\$6.3	\$6.0		ws2812b In built IC	30	30	12V	9w	256	1. FPC width: 12*4mm; 2. FPC color: white/black; 3. Installation: 3M adhesive tape(IP40/65); 4. G.W:280g/Roll, 5M/Roll
		DW5050RGB30T-2812b-12v	IP65/67	\$6.8	\$6.5								
		ZW5050RGB30T-2812b-12v	IP68	\$7.3	\$7.0								
3	 <p>ws2812b -60-5V</p>	BW5050RGB60T-2812b-5v	IP40	\$6.0	\$5.5		ws2812b In built IC	60	60	5v	18w	256	1. FPC width: 10*4mm; 2. FPC color: white/black; 3. Installation: 3M adhesive tape(IP40/65); 4. G.W:300g/Roll, 5M/Roll
		DW5050RGB60T-2812b-5v	IP65/67	\$6.5	\$6.0								
		ZW5050RGB60T-2812b-5v	IP68	\$7.0	\$6.5								
4	 <p>ws2812b-60-12V</p>	BW5050RGB50T-2812b-12v	IP40	\$8.4	\$7.7		ws2812b In built IC	60	60	12v	18w	256	1. FPC width: 12*4mm; 2. FPC color: white/black; 3. Installation: 3M adhesive tape(IP40/65); 4. G.W:280g/Roll, 5M/Roll
		DW5050RGB50T-2812b-12v	IP65/67	\$8.9	\$8.2								
		ZW5050RGB50T-2812b-12v	IP68	\$9.4	\$8.7								

Seq.	Photo	Item No.	IP rating	Price/M (5-500m)	205-1000m	> 1000m	IC type	Led/m	Pixels/M eter	Voltage (DC)	Max Power	Grey Grade	Description
5	 ws2812b -60-5mm	BW5050RGB60T-2812b-5mm	IP40	\$6.8	\$6.1		ws2812b In built IC	60	60	5v	18w	256	1. FPC width: 5*3mm; 2. FPC color: white/black; 3. Installation: 3M adhesive tape(IP40/65); 4. G.W:300g/Roll, 5M/Roll
		DW5050RGB60T-2812b-5mm	IP65/67										
		TW5050RGB60T-2812b-5mm	IP68										
6	 ws2812b -74	BW5050RGB74T-2812b-5v	IP40	\$8.9	\$8.2		ws2812b In built IC	74	74	5v	22.2w	256	1. FPC width: 12*4mm; 2. FPC color: white/black; 3. Installation: 3M adhesive tape(IP40/65); 4. G.W:280g/Roll, 5M/Roll
		DW5050RGB74T-2812b-5v	IP65/67	\$9.4	\$8.7								
		ZW5050RGB74T-2812b-5v	IP68	\$9.9	\$9.2								
7	 WS2812B-96	BW5050RGB96T-2812b-5v	IP40	\$11.6	\$11.0		ws2812b In built IC	96	96	5v	22.2w	256	FPC width: 12mm*4mm, backing with 3M adhesive tape (IP40/65), FPC color: white&black, G.W:320g/Roll, 5M/Roll
		DW5050RGB96T-2812b-5v	IP65/67	\$12.1	\$11.5								
		ZW5050RGB96T-2812b-5v	IP68										
8	 WS2812B-144	BW5050RGB144T-2812-5v	IP40	\$16.5	\$15.5		ws2812b In built IC	144	144	5V	43.2	256	FPC width: 12mm*4mm, backing with 3M adhesive tape, FPC color: white, G.W:320g/Roll, 5M/Roll
		DW5050RGB144T-2812-5v	IP65/67	\$17.0	\$16.0								

Seq.	Photo	Item No.	IP rating	Price/M (5-100m)	150- 400m	>405m	IC type	Led/ meter	Pixels/ Meter	Voltage (DC)	Max Power	Grey Grade	Description
9	 ws2811 -30-12V	BW5050RGB30T-2811-12V	IP40	\$2.9	\$2.6		ws2811	30	10	12V	7.2W	256	FPC width: 10mm*4mm, backing with 3M adhesive tape, FPC color: white, G.W:320g/Roll, 5M/Roll
		DW5050RGB30T-2811-12V	IP67	\$3.4	\$3.1								
10	 ws2811 -48-12V	BW5050RGB48T-2811-12V	IP40	\$4.2	\$3.9		ws2811	48	16	12V	11.5W	256	FPC width: 10mm*4mm, backing with 3M adhesive tape, FPC color: white, G.W:320g/Roll, 5M/Roll
		DW5050RGB48T-2811-12V	IP67	\$4.7	\$4.4								
11	 ws2811 -60-12V	BW5050RGB60T-2811-12V	IP40	\$5.5	\$5.0		ws2811	60	20	12V	14.4W	256	FPC width: 10mm*4mm, backing with 3M adhesive tape, FPC color: white, G.W:320g/Roll, 5M/Roll
		DW5050RGB60T-2811-12V	IP67	\$6.0	\$5.5								
12	 ws2811 -90-12V	BW5050RGB90T-2811-12V	IP40	\$8.9	\$8.4		ws2811	90 LED	30	12V	21.6W	256	FPC width: 20mm*2mm, backing with 3M adhesive tape, FPC color: white, G.W:350g/Roll, 5M/Roll
		DW5050RGB90T-2811-12V	IP65/67	\$9.5	\$9.0								


Promotion:
18 month of
warranty

Remark:

1. Price term: Ex-factory;
2. Payment term: T/T, Western Union and PayPal;
3. Epistar chips
4. Warranty: 2 years;
6. PCB color: both White & Black

Protection rate:

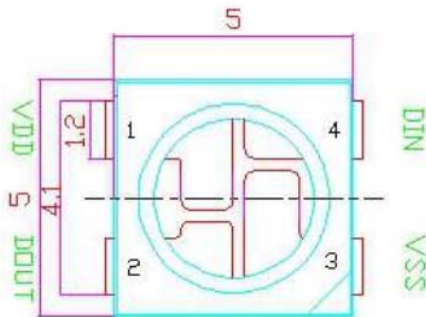

- IP40 Non-waterproof backing 3M ta
 - IP65 Epoxy coating backing 3M tap
 - IP67 Silicone tube without 3M tape
 - IP68 silicone tube + glue filled with
- To learn more, please click [here](#)





Emitting color	Model	Wavelength(nm)	Luminous intensity(mcd)	Voltage(V)
Red	13CBAUP	620-630	550-700	1.8-2.2
Green	13CGAUP	515-530	1100-1400	3.0-3.2
Blue	10R1MUX	465-475	200-400	3.0-3.4

Pixel LED controller

Free-programming LED controller

	Photo	Details	Price	Software
1	 <p style="text-align: center;">2013-X</p>	<ol style="list-style-type: none"> 1. Input:DC5V or 7-24V; 2. 300 models available, RF remote control panel; 3. Load: MAX 2048 pixels, speed, brightness and pixels(8-2048) adjustable; 4. Support ws2811, tm1809,etc. 	\$7.9/pcs	free-programming
2	 <p style="text-align: center;">WF-300</p>	<ol style="list-style-type: none"> 1. DC5V-24V, control MAX 1024 Pixels, 2. 83 kinds of programs embedded, 3. compatible with Android/IOS. 4. Support ws2801, ws2811, TM1809, UCS1903. 	\$29/pcs	free-programming (magic color)

SD LED controller

	Photo	Details	Price	Software
3	 <p style="text-align: center;">T-1000S-R</p>	<ol style="list-style-type: none"> 1. Input: DC5V-24V; 2. 2048 pixels (MAX), 16 programs in the SD card; 3. 3. Mode & speed adjustable; 4. GW: 0.5KGS. 	\$35/pcs	ledEdit2014
4	 <p style="text-align: center;">T-8000A</p>	<ol style="list-style-type: none"> 1. Input: DC5V, off line control, 2. 8 × 1024 pixels, MAX 16 programs in the SD card -- 256Mb, 3. DC5v adaptor included, GW: 0.9KGS 	\$89/pcs	ledEdit2014

5	 <p>Music-803SC</p>	<p>1. Input AC220v, music interactive controller; 2. 4 kinds of playing mode: Data-Speed, Data-Music, Data-Auto, Data-sequence; 3. Max: 2560 pixels; 4. Support DMX512 console to change modes/speed/brightness. 5. 0.9KG/pcs.</p>	\$75/pcs	ledBuild
Ethernet LED controller				
	Photo	Details	Price	Software
6	 <p>T-300K</p>	<p>1. Input: AC110-220V, 8 × 1024 pixels; 2. Support online/offline control, 3. Support cascade connection, 4. 2.5KGS</p>	\$180/pcs	ledEdit2014
7	 <p>LM-501</p>	<p>1. AC110-220V, 3w/pcs; 2. SPI: 4 × 512 pixels; Art-net: 4 * 512/1024/1536 channels; 3. online/off-line control, compatible with Madrix, we don't provide USB dongle; 4. 2.5 KG/pcs.</p>	\$222/pcs	Artnet to SPI easyled OR Madrix
8		<p>1. Input: AC110-220v, 2. Slave controller of LM501, 3. 4*512 pixels/channels</p>	\$85/pcs	slave controller of LM501